LED TRAFFIC DIRECTORS (DIRECTORS, ARROWS)

FROM GROTE











EXCEEDS




5-YEAR WARRANTY

VOLTAGE: 10-16 VDC

78200 AMP DRAW: 1.6 AMPS @ 12.8 VDC **78210 AMP DRAW**: 2.4 AMPS @ 12.8 VDC **78270 AMP DRAW**: 3.2 AMPS @ 12.8 VDC **78580 AMP DRAW**: 10.4 AMPS @ 12.8 VDC **98523 OPERATING RANGE**: 9-16 VDC


98523 AMP DRAW: 2 OUTPUTS @ 2.5 AMPS AVG. (5 AMP PEAK), 2 OUTPUTS @ 0.06 AMPS AVG. MATERIAL: POLYCARBONATE/ALUMINUM

MOUNTING TYPE: PERMANENT **OPERATING TEMPERATURE**: -30°C(-22°F) TO +50°C (122°F)



MAXIMIZE SAFETY WITH CONFIDENCE

Safely control traffic through a work area from inside the vehicle with Grote's LED traffic directors. Including four modes with distinctive flash options, these purpose-built traffic directors are made from durable extruded aluminum, and will not warp or bend.

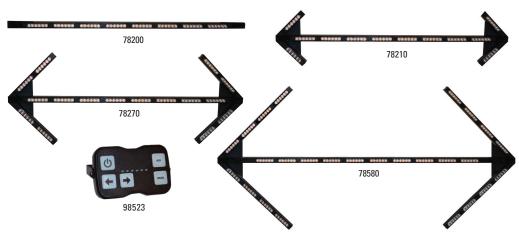

FEATURES & BENEFITS

- Operating modes include direct left, direct right, center-out, and warn (alternating flash)
- Front-load access allows for quick and easy replacement of individual heads
- The compact form factor reduces weight and wind resistance, making installation easier and improving vehicle performance
- Constructed from durable extruded aluminum that won't warp or bend
- Backed by a 5-year limited warranty for long-term reliability

PART #	DESCRIPTION
78200	LED TRAFFIC DIRECTOR
78210	SMALL LED TRAFFIC DIRECTOR WITH ARROW
78270	LARGE LED TRAFFIC DIRECTOR WITH DUAL LAMP ARROW
78580	EXTRA LARGE LED TRAFFIC DIRECTOR WITH QUAD LAMP ARROW
98523	PROGRAMMABLE CONTROLLER, 5 BUTTON, OPERATE UP TO 4 LIGHTS/DEVICES
66621	60' CONTROLLER CABLE
98343	REPLACEMENT MODULE FOR TRAFFIC DIRECTOR (78200, 78210, 78270)





FOR MORE INFORMATION VISIT OUR WEBSITE.
GROTE.COM

